

**SCM-4800 VFD
DECANTER CENTRIFUGE**



Scomi Equipment Inc offers a comprehensive range of Solids Control equipment for oilfield applications. The Scomi Equipment Inc line of high performance centrifuges are specifically designed and engineered to efficiently and reliably separate solids from drilling mud.

The SCM-4800 VFD is precision engineered to create high G forces to separate fine solids from oilfield drilling muds and industrial fluids handling applications.

PERFORMANCE

The SCM-4800 VFD bowl and conveyor speed is infinitely adjustable up to 4000 rpm generating 3180 g's of force providing improved solids removal and reduced drilling fluids costs.

PRECISION ENGINEERING


The advanced design and precision balancing of the bowl and conveyor allow for smooth operation for extended periods of time which increases the solids removal performance of the centrifuge. Stainless steel bowl and conveyor increase resistance to wear, corrosion and chemicals, thus providing longer service life and lower maintenance costs.

FEATURES & BENEFITS

- Stainless steel rotating assembly
- Hard-faced solids discharge ports and replaceable plows to increase service life
- Tungsten carbide scroll inserts for reduced maintenance costs and improved solids conveyance
- Rugged construction and oilfield skid for the toughest environments
- Adjustable effluent ports for increased solids removal performance
- Variable frequency bowl and conveyor drives designed for infinite speed configurations.
- Runs efficiently at high speeds for long periods of time producing efficient solids separation
- Ideal for processing un-weighted or weighted drilling fluids
- Effective for high speed low gravity solids separation or for low speed high gravity solids recovery
- Torque overload protection shuts down feed pump to reduce packing off

PRINCIPLE OF OPERATION

The precision engineering of the SCM-4800 VFD allows for the high speed separation of solids from drilling fluids and industrial fluids handling applications. Drilling fluids or feed slurries are introduced to the rotating assembly via a feed tube and enters the unit. Centrifugal force, up to 3180 g’s at 4000 rpm, is applied to the slurry forcing the sand and silt particles to settle against the wall of the bowl. The solids are conveyed out of the pool of drilling fluid up the beach of the conical section to the solids discharge ports by the tungsten carbide tipped conveyor. The cleaned drilling fluid exits through the adjustable weir ports that regulate the pool depth and offer increase flexibility of separation.

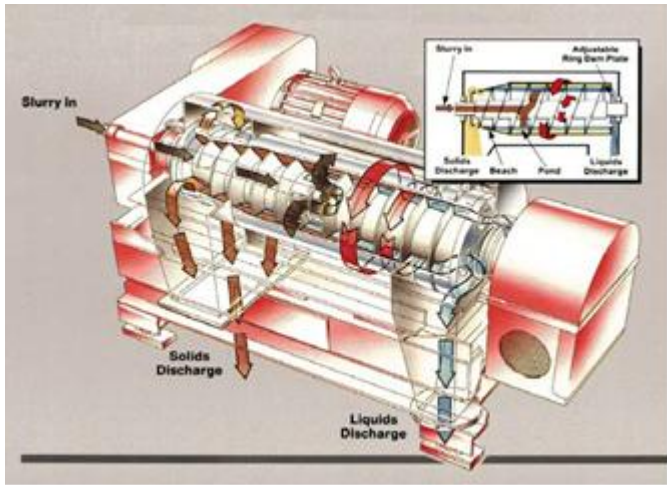

CONTROL PANEL

Class 1 Div 1 pressurized control panel with PLC controlled VFD bowl, back and feed pump drive. A graphic HMI to control and display centrifuge status, bowl rpm, conveyor differential RPM, conveyor and bowl torque loading, feed rate and alarm status.



SPECIFICATIONS

General	
Model	SCM-4800 VFD
Maximum Speed	4000 rpm
Maximum G force	3180 g’s
Maximum Flow	150 – 200 gpm @ 9.8 ppg
Bowl Diameter	14”
Bowl Length	48”
Bowl Material	316 Stainless Steel
Conveyor	E-Z flow design with axial or radial flights
Gear Box Type	3.5 Planetary
Gear Box Ratio	57:1
Gear Box Torque	50,000 in lbs
Torque Out Style	GS Coupling
Pool Depth Setting	4 Adjustable 360 degree dams
Controls	Variable Frequency Drive
Dimensions	
Length	102” (2,591 mm)
Width	70” (1,778 mm)
Height	62” (1,575 mm)
Weight	
Net	6,200 lbs (2,812 kg)
Control Panel	2,135 lbs (968.4 kg)
Utility Requirements	
Power	50 hp (37.3 kW) Main Drive 20 hp (14.9 kW) Back Drive 10 hp (7.46 kW) Pump Drive
Voltage	380 / 460 V
Frequency	50 / 60 Hz
Phase	3 Phase